
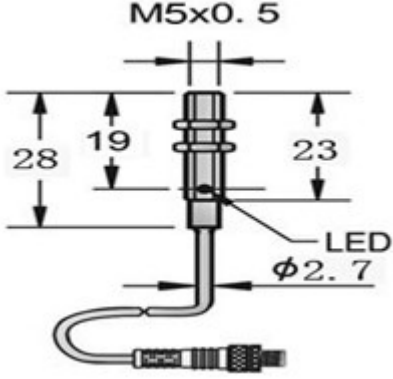



## M5×28 Pigtail

		
Diameter	M5	
• Shielded    ◦ Non-shielded	• Shielded	
Switching Distance Sn: mm	0.8mm	
Housing Material	Latão Niquelado	
• With LED    ◦ Without LED	• With LED	
Operating Voltage	10-30VDC	
Ripple	<10%	
No Load Current	<10mA	
Max. Load Current	180mA	
Leakage Current	<0.01mA	
Voltage Drop	<1.5V	
Switching Frequency	2KHZ	
Response Time	0.1ms / 0.1ms	
Switching Hysteresis	<15%(Sr)	
Repeat Accuracy	<1.0%(Sr)	
Protection Category	IP67	
Operating Temperature	-25 °C - +70 °C	
Temperature Drift	<10%(Sr)	
Short Circuit Protection	YES	
Material Active Face	POM	
DC 3 wire 10-30V PNP N.O.	IB-0,8M-5CA-PA/PCL+0.3M308SA1	26
	Wiring Diagram No.	
Cable 2M (PVC)	2.7Ø 3×0.15	
Weight(g)	Approx. 25g	