
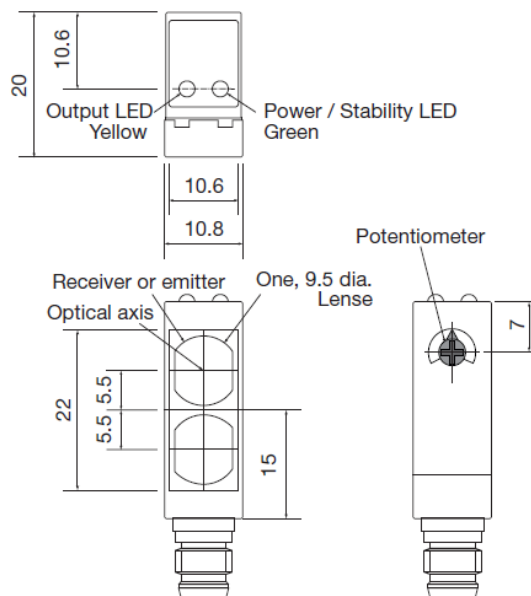
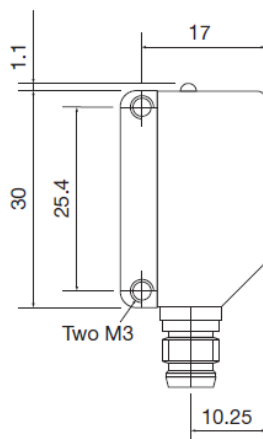



RPJ-600P-3020F4-PR/PCL

Desenho :

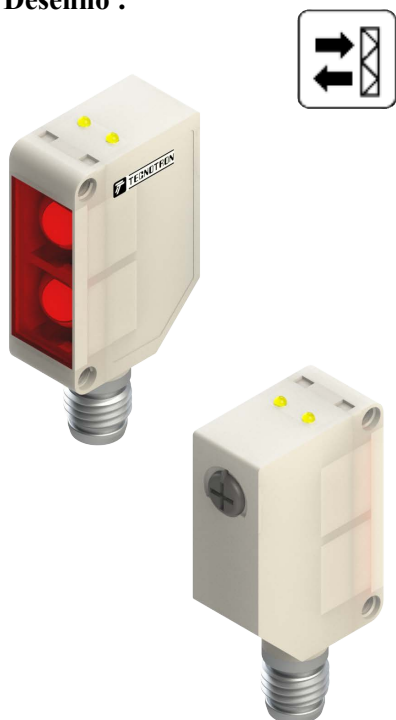

Part Number :

Operating principle :

Housing size :

Sensing range typ. max. :

Blind zone :

Light source :

Light spot size (distance) :

Sensitivity adjustment :

Indicator LED, green : Indicator

LED, yellow :

IO-Link :

Supply voltage range (Ub) :

Polarity :

Residual ripple :

Output current :

Signal high/low :

Power consumption (no load) :

Response time :

Switching frequency :

Short circuit protection :

Voltage reversal protection :

Enclosure rating :

Ambient temperature operation :

04.914.0061/921

Retro-reflective, Polarized

10 x 20 x 30mm

6 m (EP80R) / 4 m (EP60X40)

≤ 100 mm

InGaAlP, LED, 625 nm

110 mm (1.5x SD)

Electrical 210° Mechanical 240°

Excess gain

Sensing state

No

10...30 VDC

PNP

≤ 10% Vpp

≤ 100 mA

≤ (Ub-2.0 V)/approx. 0 V

≤ 30 mA

≤ 0.5 ms

≤ 1000 Hz

Yes

Yes

IP67

-25...+65°C

Shock and vibration :

IEC 60947-5-2

Weight :

20 g

Housing material :

ABS


Window material :

PMMA

Connection :

Connector M8 4-pin

Wiring Diagram :

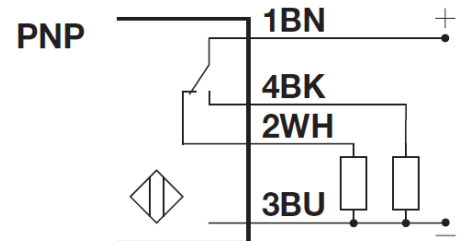

Reservamo-nos do direito de modificar qualquer informação contida neste site sem prévio aviso.
Tecnotron Automação & Controles Industriais | Rua vera cruz, 305 - CEP 06423-010 Barueri - SP
Tel / WhatsApp: +55 (11) 2744-1211 | www.tecnotron.ind.br